


BS 200 - BS 200/S ISO 02

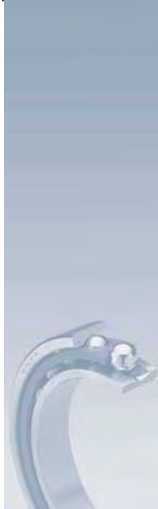

SNFA	d	D	B	R _{min}	r _{min}	C ₃₃	C ₀	V _h (ABEC 7)	M
BS 212	12	32	10	0.6	0.6	945	1 440	23 000	0.037
BS 215	15	35	11	0.6	0.6	1 025	1 760	20 000	0.047
BS 217*	17	40	12	0.6	0.6	1 365	2 380	17 700	0.069
BS 220	20	47	14	1.0	0.6	1 820	3 380	15 200	0.111
BS 225	25	52	15	1.0	0.6	2 000	4 240	13 200	0.138
BS 230	30	62	16	1.0	0.6	2 460	5 400	11 100	0.220
BS 235	35	72	17	1.1	0.6	3 055	7 100	9 600	0.320
BS 240	40	80	18	1.1	0.6	3 745	9 100	8 600	0.400
BS 245	45	85	19	1.1	0.6	3 785	9 700	7 800	0.460
BS 250	50	90	20	1.1	0.6	3 835	10 300	7 400	0.520
BS 260	60	110	22	1.5	0.6	5 805	15 800	6 100	0.860
BS 275	75	130	25	1.5	0.6	6 400	20 200	4 800	1.500

For sealed version, please consult Application Support.

BS (Special)

SNFA	d	D	B	R _{min}	r _{min}	C ₃₃	C ₀	V _h (ABEC 7)	M
BS 17/47	17	47	15	1.0	1.0	1 820	3 380	15 200	0.138
BS 20/47	20	47	15	1.0	1.0	1 820	3 380	15 200	0.128
BS 25/62	25	62	15	1.0	1.0	2 460	5 400	11 100	0.242
BS 30/62	30	62	15	1.0	1.0	2 460	5 400	11 100	0.217
BS 35/72	35	72	15	1.1	1.1	3 055	7 100	9 600	0.282

* Available on request.

